

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
27 May 2004 (27.05.2004)

PCT

(10) International Publication Number  
**WO 2004/044578 A1**

(51) International Patent Classification<sup>7</sup>: **G01N 33/20**,  
F27D 3/15, C22B 1/00

(21) International Application Number:  
PCT/ZA2003/000132

(22) International Filing Date:  
12 September 2003 (12.09.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
02/9262 14 November 2002 (14.11.2002) ZA

(71) Applicant (for all designated States except US): **INNOVATIVE MET PRODUCTS (PTY) LIMITED [ZA/ZA]**;  
Corner Commissioner & Christopher Streets, Boksburg  
East Industrial Township, 1459 Boksburg (ZA).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **HOHENSTEIN, Boyne, Friedrich [ZA/ZA]**; Corner Commissioner & Christopher Streets, Boksburg East Industrial Township, 1459 Boksburg (ZA).


(74) Agent: **LE ROUX, Marius**; D.M. Kisch, P.O. Box 781218, 2146 Sandton (ZA).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: SEPARATING VESSEL

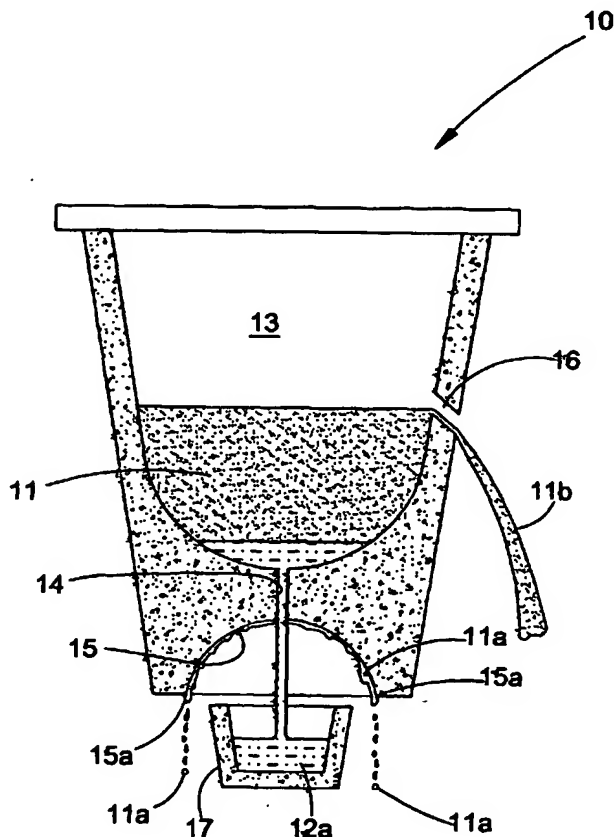

(57) Abstract: The invention provides a separating vessel (10) suitable for use in the treatment of a mineral sample wherein a molten slag (11) is separated from a molten collector material (12) comprising a container defining an interior cavity (13) for receiving the molten materials (11,12), an outlet aperture (14) leading from the interior cavity to the exterior of the container, and a separating surface (15) associated with the outlet aperture (14) which is shaped to cause droplets of flux (11a) to be carried along such surface, while droplets of collector material (12a) drip off such surface by the force of gravity.



Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*

**SEPARATING VESSEL****Field of the Invention**

- 5    **THIS** invention relates to a separating vessel particularly suitable for, but not limited to, use in mineral sample analysis.

**Background to the Invention**

- 10   In the field of fire assaying, mineral samples are mixed with a flux in a reaction vessel and fused to form a molten flux and molten collector material which collects a metal to be assayed. In conventional fire assay methods, the flux and collector material are caused to solidify and thereafter separated mechanically.

15   **Object of the Invention**

It is accordingly an object of the present invention to provide a novel separating vessel suitable for separating molten slag from a molten collector material in a

mineral sample analysis method such as a fire assay process.

### **Summary of the Invention**

- 5 According to the invention a separating vessel suitable for use in a mineral sample treatment method wherein a molten slag is separated from a molten collector material, comprises a container defining an interior cavity for receiving the molten materials, an outlet aperture leading from the interior cavity to the exterior of the container, and a separating surface associated with the outlet aperture which is shaped
- 10 to cause droplets of flux to be carried along such surface, while droplets of collector material drip off such surface by the force of gravity.

In a preferred arrangement the separating surface is a downwardly directed concave surface. Such concave surface is preferably concentrically arranged relative to the

15 outlet aperture.

Further according to the arrangement, the outlet aperture has dimensions such that the collector material passes through the aperture under the force of gravity, while the

molten flux material is substantially prevented from passing through the outlet aperture.

Thus with the above arrangement, the majority of molten flux will be arrested at the outlet aperture, but a small portion which may pass through the outlet aperture, will be separated from the collector material by the separating surface. This could for example take place where the outlet aperture is gradually enlarged through use.

In a preferred arrangement the outlet aperture will be disposed at low level in the interior cavity, and a slag outlet will be provided in the container spaced vertically upwardly from the outlet aperture, the arrangement being one wherein molten slag which overlies the collector material in the molten state will drain from the slag outlet during the process of draining the collector material through the outlet aperture. Molten slag which ultimately remains in the separating vessel after removal of the collector material can be removed from the vessel for example by tilting or inverting the vessel.

Also included separately within the scope of the invention is a method of separating

4

molten collector material from molten slag suitable for use in the treatment of a mineral sample comprising the steps of:

providing the separating vessel of the invention;

5

introducing a mixture of molten slag and molten collector material into the vessel whereby the slag settles above the collector material as a result of density differentials;

10

draining the collector material through the outlet aperture under the force of gravity while the slag is substantially arrested by the outlet aperture;

15

further separating the collector material from the slag which has passed through the outlet aperture at the separating surface where at collector material runs vertically downwardly from the exit of the outlet aperture under the force of gravity while the slag is displaced laterally along the separating surface.

Further according to the invention the method includes the step of draining slag through the slag outlet. Preferably, slag will drain through the outlet during or prior to draining the collector material through the outlet aperture.

## 5 **Brief Description of the Drawings**

The invention is further described in the preferred embodiment described hereunder purely by way of example with reference to the accompanying drawings wherein:

10    Figure 1                    is a schematic sectioned elevation of a separating vessel in accordance with the invention; and

         Figures 2 to 4           are schematic sectioned elevations of the separating vessel in Figure 1, illustrating various steps in separating a molten slag  
15                                   from a molten collector material in fire forming part of a fire assay process.

**Detailed Description of Drawings**

Referring to the drawings, the invention provides a novel separating vessel 10 for separating molten slag 11 from molten collector material 12 for example in a fire assay process.

The separating vessel 10 comprises a container having an interior receiving zone 13 for the molten materials 11, 12, as shown in Figure 1.

The vessel 10 of the invention further includes a low level outlet aperture 14 which is of a relatively small diameter, and will permit the collector material 12 to drain through such aperture 14 by gravity, while the molten slag 11 will substantially be prevented from passing through the aperture 14 as a result of the higher viscosity and/or lower density of the molten slag 11.

15

It is a feature of the invention that a separation surface 15 is provided on the exterior of the container 10 in the zone of the outlet aperture 14, such separation surface 15 being adapted to separate any molten slag 11a which may trickle through the outlet



aperture 14, from the molten collector material 12a, Figure 3 and Figure 4.

In the arrangement illustrated, this separating surface 15 is in the form of a concave surface which is concentrically arranged relative to the axis of the outlet aperture 14.

- 5 It has been found that with the arrangement of the invention, molten slag droplets 11a tend to cling to the concave surface 15, and are carried laterally away from the outlet aperture 14 ultimately to gather at a rim 15a of the concave surface from which they drop downwardly under the force of gravity, Figure 3. This behaviour of the molten slag droplets 11a can be ascribed to the low density of the slag material 11 and/or its
- 10 surface tension. The collector material 12a, Figure 3, on the other hand having different physical characteristics in respect of density and surface tension tends to pour directly vertically downwardly from the exit of the outlet aperture 14 under the force of gravity.
- 15 In the arrangement illustrated, the molten collector material 12a is collected in a collection vessel 17, while the molten slag drops 11a are transported laterally beyond the collection vessel 17 for separate collection.

A further feature of the invention comprises an intermediate outlet 16 for molten slag 11 in the side wall of the container 10 in a position spaced vertically upwardly from the outlet aperture 14 for collector material 12. The purpose of this intermediate slag outlet 16 is to drain the majority of molten slag 11 from the separating container 5 while the molten collector material 12 is being drained through the outlet aperture 14.

The relatively small portion of slag 11 which ultimately remains in the separation vessel 10 after draining of the collector material 12 can thus readily be removed from the container 10 by inversion thereof, or tilting thereof, not shown.

10 Thus in use, for example in a fire assay process for determining the concentration of PGM's (Platinum Group Metals) in an ore sample, such ore sample will be comminuted and mixed with a flux material, and introduced into a reaction vessel. The flux will be caused to fuse to produce a molten slag and a molten collector material such as lead, silver, etc, which acts to collect the PGM's. The molten 15 mixture is then introduced into the separating vessel 10 of the invention in order to separate the molten collector material 12 from the molten slag 11 as described above. In certain cases the separating vessel 10 of the invention could also act as the reaction vessel.

It has been found that with the method described above, sufficient and effective separation of the molten slag 11 and molten collector material 12 can be achieved to enable further analysis of the collector material 12 and entrained PGM's.

5

Doubtless many variations are possible without departing from the principles set out in the consistory clauses. Thus, the separation surface 15 could for example merely comprise a surface which is angled to the vertical in a single plane or in several planes whereby molten slag drops 11a are carried transversely away from outlet duct 14 for separate collection. Alternatively, the separation surface 15 could be could be conical.

10

**Claims**

1. A separating vessel suitable for use in the treatment of a mineral sample wherein a molten slag is separated from a molten collector material comprising a container defining an interior cavity for receiving the molten materials, an outlet aperture leading from the interior cavity to the exterior of the container, and a separating surface associated with the outlet aperture which is shaped to cause droplets of flux to be carried along such surface, while droplets of collector material drip off such surface by the force of gravity.
2. A separating vessel according to claim 1 wherein the separating surface is a downwardly directed concave surface.
3. The separating vessel according to claim 2 wherein the concave surface is concentrically disposed relative to the outlet aperture.

4. The separating vessel according to any one of claims 1 to 3 wherein the outlet aperture has dimensions such that the collector material passes through the aperture under the force of gravity, while the molten flux material is substantially prevented from passing through the outlet aperture, so that the majority of molten flux will be arrested at the outlet aperture, but a small portion which may pass through the outlet aperture
5. The separating vessel according to any one of claims 1 to 4 wherein the outlet aperture is disposed at low level in the interior cavity, and a slag outlet will be provided in the container spaced vertically upwardly from the outlet aperture, the arrangement being one wherein molten slag which overlies the collector material in the molten state will drain from the slag outlet during the process of draining the collector material through the outlet aperture.

6. A separating vessel suitable for use in the treatment of a mineral sample wherein a molten slag is separated from a molten collector material substantially as herein described and exemplified with reference to the accompanying drawings.

5

7. A method of separating molten collector material from molten slag suitable for use in the treatment of a mineral sample comprising the steps of providing the separating vessel claimed in any one of claims 1 to 6:

10

introducing a mixture of molten slag and molten collector material into the vessel whereby the slag settles above the collector material as a result of density differentials;

15

draining the collector material through the outlet aperture under the force of gravity while the slag is substantially arrested by the outlet aperture;

further separating the collector material from the slag which

has passed through the outlet aperture at the separating surface where at collector material runs generally vertically downwardly from the exit of the outlet aperture under the force of gravity while the slag is displaced laterally along the separating surface.

8. The method according to claim 7 wherein a slag outlet is provided vertically upwardly spaced from the collector material outlet including the step of draining slag through the slag outlet.

10

9. The method according to claim 8 wherein slag is drained through the slag outlet during or prior to draining the collector material through the collector material outlet aperture.

- 15 10. A method of separating molten collector material from molten slag suitable for use in the treatment of a mineral sample substantially as herein described and exemplified with reference to the accompanying drawings.

1/4

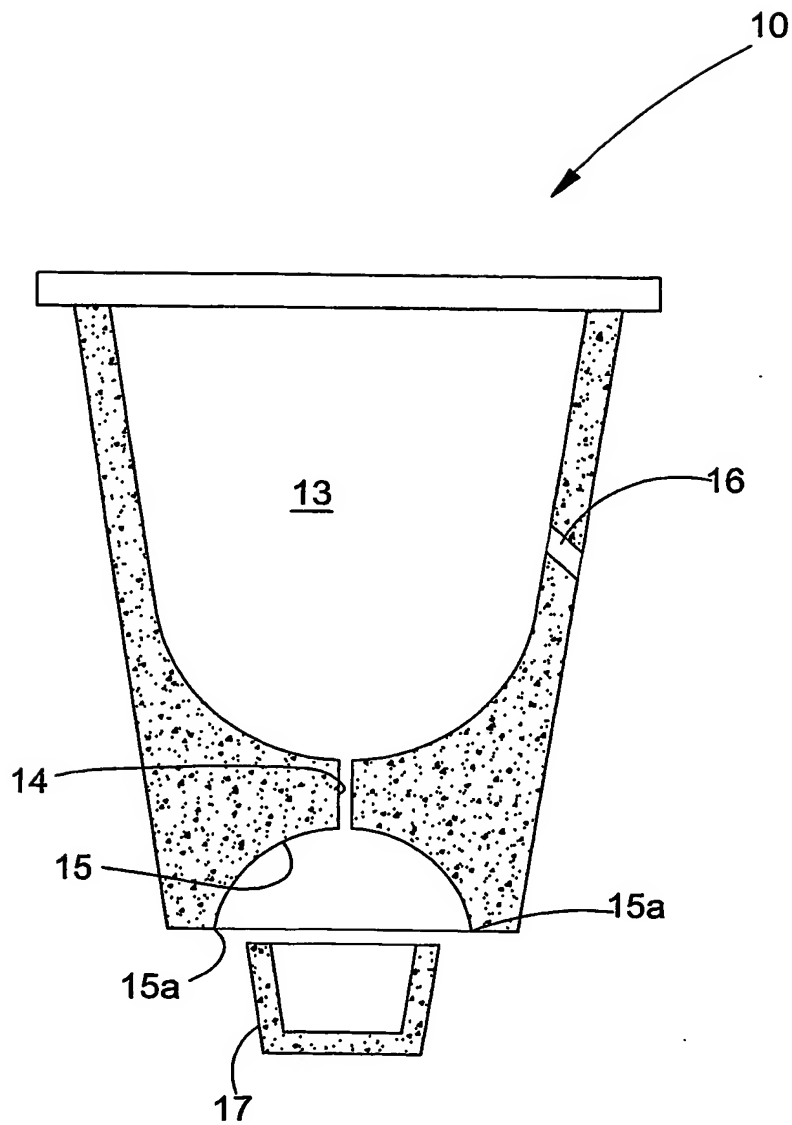


FIGURE 1



2/4

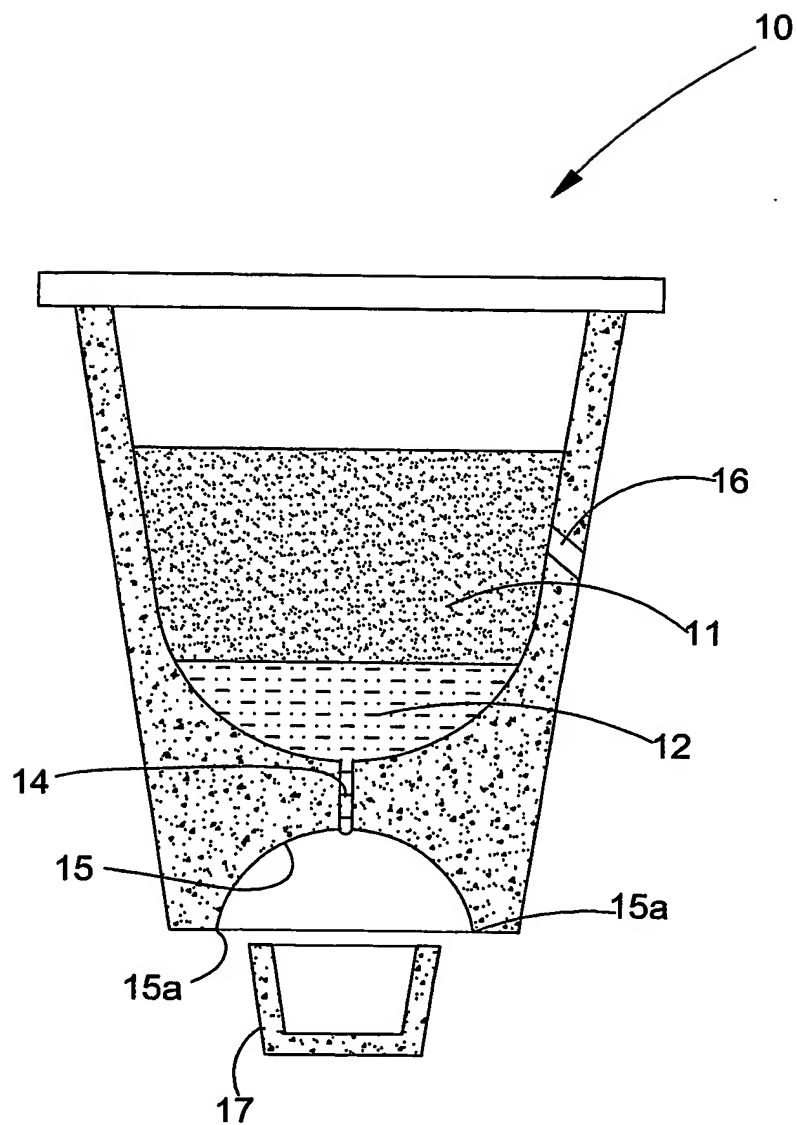



FIGURE 2

$\frac{3}{4}$ 

**FIGURE 3**

**BEST AVAILABLE COPY**

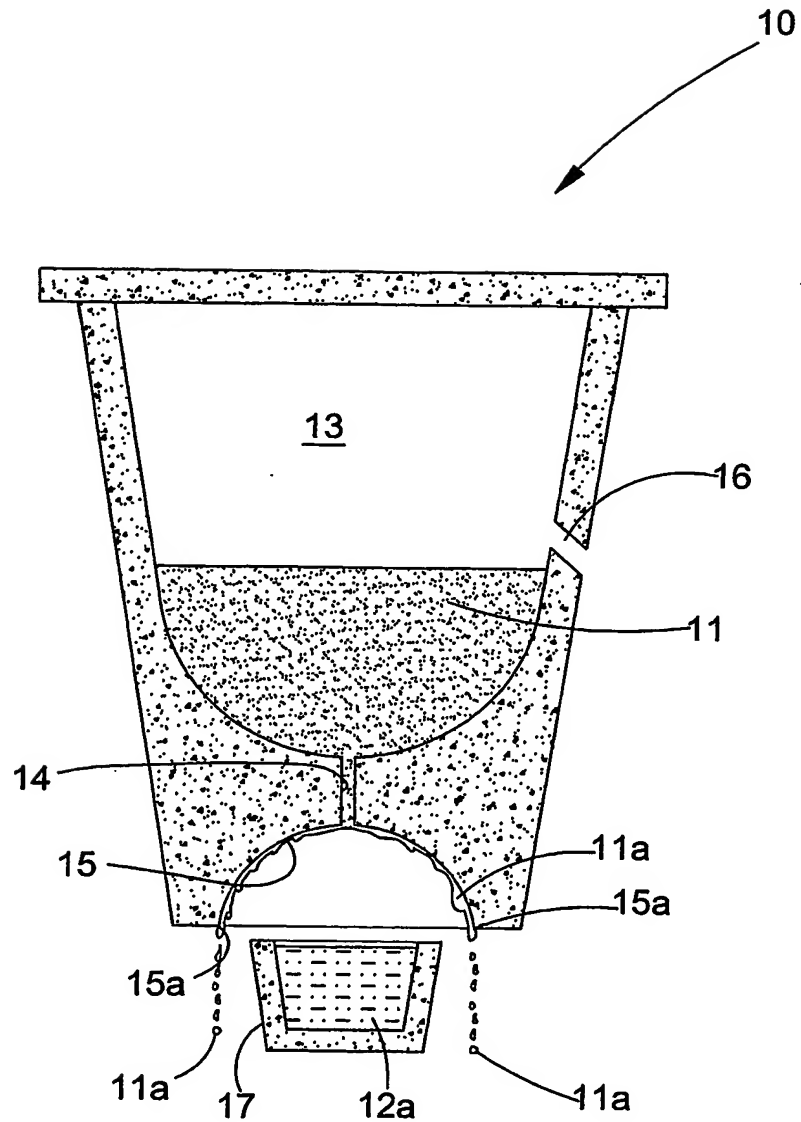


FIGURE 4

# INTERNATIONAL SEARCH REPORT

Application No  
ZA 03/00132

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G01N33/20 F27D3/15 C22B1/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G01N F27D C22B F27B B01D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 02 04919 A (INNOVATIVE MET PRODUCTS (PTY) LIMITED) 17 January 2002 (2002-01-17)	
A	BE 695 996 A (MANNESMANN AG) 1 September 1967 (1967-09-01)	
A	US 6 074 598 A (R.J.KOFFRON) 13 June 2000 (2000-06-13)	
A	US 4 769 066 A (M.EIDEM) 6 September 1988 (1988-09-06)	

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

17 December 2003

Date of mailing of the international search report

29/12/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Coulomb, J

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/ZA 03/00132

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0204919	A	17-01-2002	AU 7203701 A BR 0112301 A CA 2414524 A1 EP 1301781 A2 WO 0204919 A2 ZA 200105789 A	21-01-2002 08-07-2003 17-01-2002 16-04-2003 17-01-2002 14-08-2002
BE 695996	A	01-09-1967	LU 53321 A1 NL 6606648 A	30-05-1967 09-10-1967
US 6074598	A	13-06-2000	NONE	
US 4769066	A	06-09-1988	SE 454208 B DE 3764661 D1 EP 0234536 A1 JP 62263914 A SE 8600823 A	11-04-1988 11-10-1990 02-09-1987 16-11-1987 25-08-1987